

## Flex spring harrows, foldable in three parts



This harrow folds for transportation along roads and is equipped with vibrating springs that are perfect for preparing the topsoil for sowing: the spring enters the ground and effectively breaks up of clods of soil.



**STANDARD WITH CAGE ROLLER Ø 400 mm 14 TUBES Ø 27 mm**

### **MODELS**

<b>Model</b>	<b>WIDTH</b>	<b>FRAME</b>	<b>WEIGHT</b>	<b>N. SPRINGS</b>
<b>ERV250</b>	2500 mm	FIXED	600 kg	25
<b>ERV300</b>	3000 mm	FIXED	700 kg	33
<b>ERV400-I</b>	4000 mm	FOLDING	1200 kg	44
<b>ERV500-I</b>	5000 mm	FOLDING	1500 kg	54
<b>ERV600-I</b>	6000 mm	FOLDING	1900 kg	65
<b>Standard: 1 cage roller</b>		Available Rollers		

## **ACCESSORIES**

Rear footprint lights  
Security panels  
Lamellar roller + tubes Ø 400 mm  
Parker roller, Ø 523 mm from point to point  
ERV300 attack for road moving  
Front levelling bar 2.50 m  
Front levelling bar 3.00 m  
Ploughshare made of NiCrMo4

Front levelling bar 4.00 m  
Front levelling bar 5.00 m  
Front levelling bar 6.00 m  
Supplementary rear pistons  
Double laminated rollers + tubes for 4.00 m  
Double laminated rollers + tubes for 5.00 m  
Double laminated rollers + tubes for 6.00 m

Notes: on m 6.00 no.4 cylinders for hydraulic folding Standard equipment

Notes: the supplementary pistons must be installed behind with the double rollers

## **ATTACHMENT**



Fork attachment with fixed and slitted pin for 4 - 5 - 6 mt




Detail of spring 32x12

with eyelet reinforcement and heavy bracket



Bar attachment for 2.5 -

3 mt

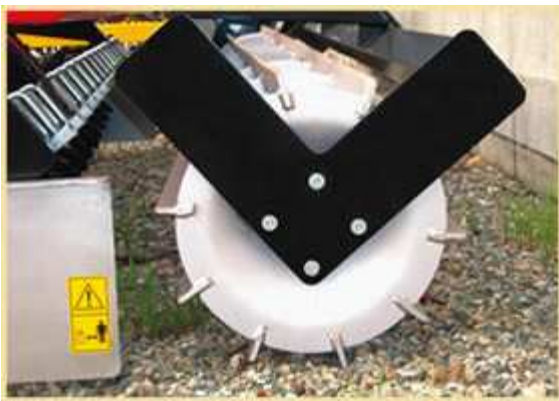



Independent hydraulic

system with safety valves and descent control valve

***Detail of spring 32x12 with eyelet reinforcement and heavy bracket***



OPTIONAL: Rullo parker con raschietti regolabili