

Log grabs mod. Comby 3



The gripper is provided with standard "teeth" accessories

Made from Domex 710 steel and equipped with lock valve

The trunk grabs are used to transport, load, and unload tree trunks that have been cleaned of branches and are ready for transport: They can be assembled on forestry cranes of all models and sizes.

An important innovation is the wood chip grab, that can be assembled on a crane and split trunks measuring up to 80 cm in diameter to prepare them for the successive production processes.

Finally, the Comby 3 grab can also be used for: brushwood or manure, while if the yellow parts are disassembled it becomes a normal wood grab.


This wood grab can be used in three ways:

1. Use of only the grab without teeth and bucket for loading tree trunks;
2. Use of the red teeth for grappling branches or loose materials;
3. Use of 2 buckets for loading wood chips, sand, earth and all loose materials.

All this can be done by simply assembling 4 pivots in less than 2 minutes.

A MAXIMUM pressure valve (available on request) is fitted for pressure above 250 BAR

TECHNICAL DATA

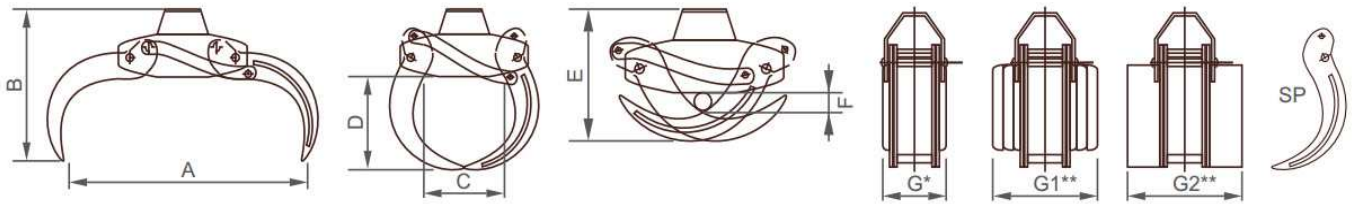

TECHNICAL DATA FOR REFERENCE PURPOSES

MODEL STANDARD	Weight kg	Lift Kg	MAX bar	A mm	B mm	C mm	D mm	E mm	F mm	G* mm	G1/G2* mm	SP mm	AREA mq
THLS 30 COMBY	135	1200	200	1000	730	405	450	460	65	310	650	10	0,146
TP 120 COMBY	143	1500	200	1200	770	450	480	510	80	355	680	10	0,201
TP 135 COMBY	230	1900	200	1350	880	500	540	550	90	370	750	12	0,255
TP 155 COMBY	300	2500	200	1550	960	620	630	600	100	430	850	12	0,336
TP 175 COMBY	405	3000	200	1750	1100	680	710	670	130	490	1000	15	0,428

* Grab only, without accessories

** With teeth - bucket accessories

MODEL professional	Weight kg	Lift Kg	MAX BAR	A mm	B mm	C mm	D mm	E mm	F mm	G* mm	G1/G2* mm	SP mm	AREA mq
THLS 30 COMBY professional	145	1400	250	1000	730	405	450	460	65	310	650	10	0,146
TP 120 COMBY professional	205	1700	250	1200	770	450	480	510	80	355	680	10	0,201
TP 135 COMBY professional	250	2100	250	1350	880	500	540	550	90	370	750	12	0,255
TP 155 COMBY professional	320	2700	250	1550	960	620	630	600	100	430	850	12	0,336
TP 175 COMBY professional	445	3200	250	1750	1100	680	710	670	130	490	1000	15	0,428