

Rock Grapple - wood



Mod.TP135RF-COMBY



Mod.RF




Mod.RP

Made from Domex 710 steel and equipped with lock valve

Rock grapple help rocks handling, loading, unloading and laying

TECHNICAL DATA FOR REFERENCE PURPOSES

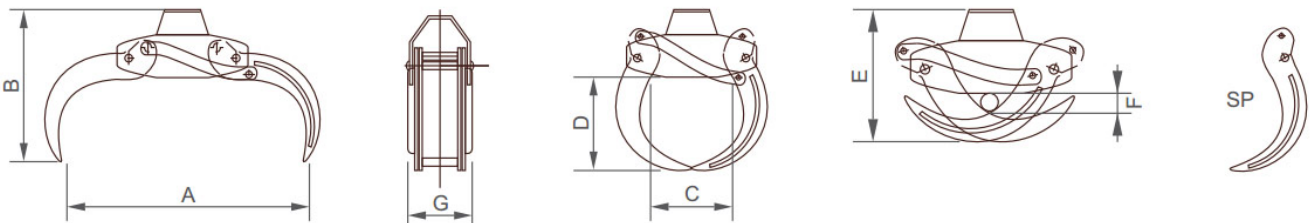


MODE L RF	Weight kg	Lift Kg	lift hor izontal positio n	MAX BAR	A mm	B mm	C mm	D mm	E mm	F mm	G mm	SP mm	AREA mq
TP 100 RF	120	1600	800 kg	250	1000	730	405	450	460	65	310	10	0,146
TP 120 RF	132	1900	950 kg	250	1200	770	450	480	510	80	355	10	0,201
TP 135 RF	239	2300	1150 kg	250	1350	880	500	540	550	90	370	12	0,255
TP 155 RF	330	2900	1450 kg	250	1550	960	620	630	600	100	430	12	0,336
TP 175 RF	408	3400	1700 kg	250	1750	1100	680	710	670	130	490	15	0,428
TP 200 RF	540	4000	2000 kg	250	2000	1300	800	820	780	150	560	20	0,531

MODEL RP	Weight kg	Lift Kg	MAX BAR	A mm	B mm	C mm	D mm	E mm	F mm	G mm	SP mm	AREA mq
TP 100 RP	89	1600	250	1000	730	405	450	460	65	310	10	0,146
TP 120 RP	121	1900	250	1200	770	450	480	510	80	355	10	0,201
TP 135 RP	170	2300	250	1350	880	500	540	550	90	370	12	0,255
TP 155 RP	231	2900	250	1550	960	620	630	600	100	430	12	0,336
TP 175 RP	374	3400	250	1750	1100	680	710	670	130	490	15	0,428
TP 200 RP	495	4000	250	2000	1300	800	820	780	150	560	20	0,531

A MAXIMUM pressure valve (available on request) is fitted for pressure above 250 BAR

TECHNICAL DATA FOR REFERENCE mod.COMBY

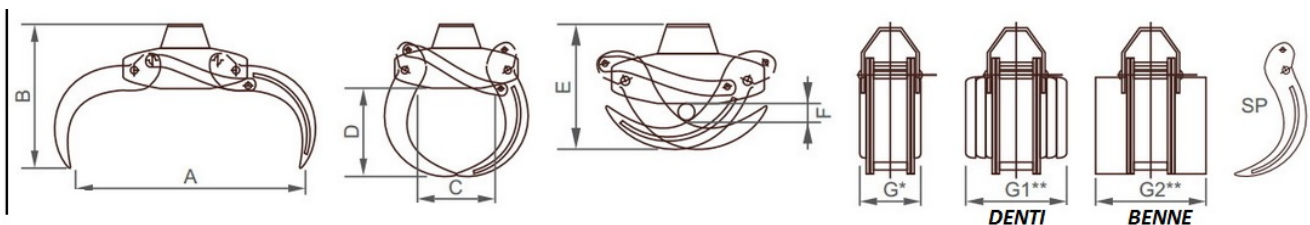

MODE L RF CO MBY	Weigh t kg	Lift Kg	lift ho rizont al posi tion	MAX BAR	A mm	B mm	C mm	D mm	E mm	F mm	G mm	G1 TEET H G2 BU CKET S mm	SP mm	AREA mq
TP 100 RF CO MBY	153	1600	800 kg	250	1000	730	405	450	460	65	310	650	10	0,146
TP 120 RF CO MBY	179	1900	950 kg	250	1200	770	450	480	510	80	355	680	10	0,201
TP 135 RF CO MBY	304	2300	1150 kg	250	1350	880	500	540	550	90	370	750	12	0,255
TP 155 RF CO MBY	340	2900	1450 kg	250	1550	960	620	630	600	100	430	850	12	0,336
TP 175 RF CO MBY	513	3400	1700 kg	250	1750	1100	680	710	670	130	490	1000	15	0,428

MODE L RP COMB Y	Weight kg	Lift Kg	MAX BAR	A mm	B mm	C mm	D mm	E mm	F mm	G mm	G1 TEETH G2 BU CKETS mm	SP mm	AREA mq
TP 100 RP COMB Y	122	1600	250	1000	730	405	450	460	65	310	650	10	0,146
TP 120 RP COMB Y	168	1900	250	1200	770	450	480	510	80	355	680	10	0,201
TP 135 RP COMB Y	235	2300	250	1350	880	500	540	550	90	370	750	12	0,255
TP 155 RP COMB Y	319	2900	250	1550	960	620	630	600	100	430	850	12	0,336
TP 175 RP COMB Y	479	3400	250	1750	1100	680	710	670	130	490	1000	15	0,428

ESCAVATOR MATCHED



MODELLO	ESCAVATOR MATCHED	MODEL	ESCAVATOR MATCHED
TP 100 RP	MAX 4 ton.	TP 100 RF	MAX 3,5 ton.
TP 120 RP	MAX 7 ton.	TP 120 RF	MAX 5,5 ton.
TP 135 RP	MAX 12 ton.	TP 135 RF	MAX 8,5 ton.
TP 155 RP	MAX 15 ton.	TP 155 RF	MAX 10,5 ton.
TP 175 RP	MAX 20 ton.	TP 175 RF	MAX 13 ton.
TP 200 RP	MAX 25 ton.	TP 200 RF	MAX 16 ton.

GRAPPLE ACCESSORIES

•

[ACCESSORIES Grapple- Rock grapple - Clamshell buckets](#)

VIDEO



[Rock grapple -mod. TP135 RF - TECNOMECCANICA](#)



Tecnomeccanica S.r.l.
Via 1° Maggio, 56 - 10035 Casale di Mazzè (TO)
Tel. +39 011 9830776 - Fax +39 011 9830776
www.tecnomeccanicaformia.it