Self-loading salt spreader with scatter type spreading


Stainless steel disc as standard



Self-loading broadcast salt-spreader - The top of the line of Self-loading salt spreaders.
A rotating place optimises the distribution and regulates the span of the material being spread.

The machine comes equipped with a hydraulic cylinder that regulates the aperture and closure of the outlet.

Tecnomeccanica S.r.l.
Via I° Maggio, 56 - 10035 Casale di Mazzè (TO)
Tel. +39 011 9830776 - Fax +39 011 9830776
www.tecnomecannicaformia.it

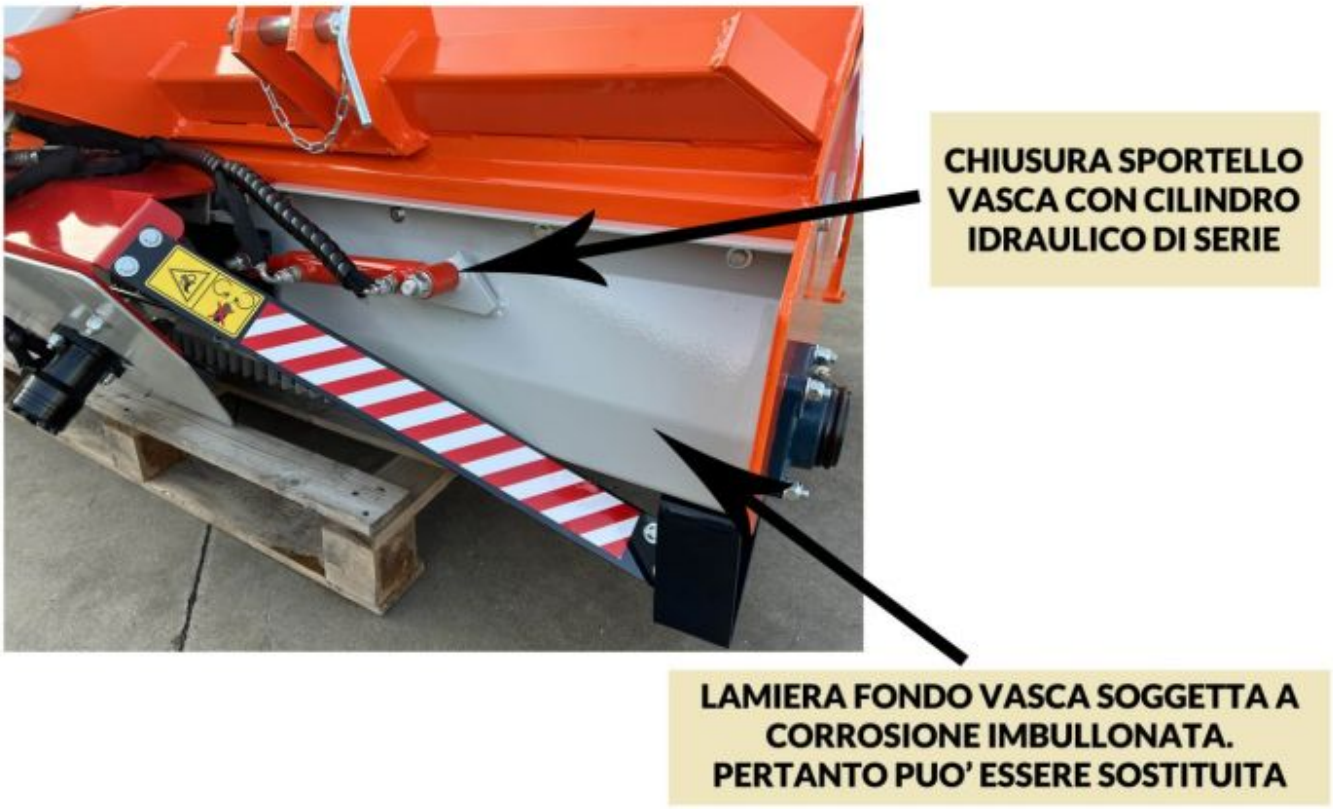

PROFESSIONAL Model: max capacity from 0,75 to 1,15 m³



Tecnomeccanica S.r.l.
Via I° Maggio, 56 - 10035 Casale di Mazzè (TO)
Tel. +39 011 9830776 - Fax +39 011 9830776
www.tecnomecannicaformia.it

Models	Max size (m)	Min.weight (kg)	max capacity (m³)	Spread (m)
SP 160 PS - 0,75	1,66	395	0,75	min.2 mt- max 12 mt
SP 200 PS - 0,92	2,06	470	0,92	min.2 mt- max 12 mt
SP 230 PS - 1,05	2,36	590	1,05	min.2 mt- max 12 mt
SP 250 PS - 1,15	2,55	630	1,15	min.2 mt- max 12 mt

PROFESSIONAL MAXI Model: max capacity from 1,19 to 1,93 m³



Models	Max size (m)	Min.weight (kg)	max capacity (m³)	Spread (m)
SP 160 PS-MAXI - 1,19	1,66	459	1,19	min.2 mt- max 12 mt
SP 200 PS-MAXI - 1,48	2,06	550	1,48	min.2 mt- max 12 mt
SP 230 PS-MAXI - 1,70	2,36	690	1,70	min.2 mt- max 12 mt
SP 250 PS-MAXI - 1,93	2,55	750	1,93	min.2 mt- max 12 mt

INDUSTRIAL Model: max capacity from 0,85 to 1,33 m³

Tecnomeccanica S.r.l.
Via I° Maggio, 56 - 10035 Casale di Mazzè (TO)
Tel. +39 011 9830776 - Fax +39 011 9830776
www.tecnomecannicaformia.it



Models	Max size (m)	Min.weight (kg)	max capacity (m³)	Spread (m)
SP 160 IS - 0,85	1,66	425	0,85	min.2 mt- max 12 mt
SP 200 IS - 1,02	2,06	515	1,02	min.2 mt- max 12 mt
SP 230 IS - 1,15	2,36	640	1,15	min.2 mt- max 12 mt
SP 250 IS - 1,33	2,55	680	1,33	min.2 mt- max 12 mt

INDUSTRIAL MAXI Model: max capacity from 1,29 to 2,03 m³

Models	Max size (m)	Min.weight (kg)	max capacity (m³)	Spread (m)
SP 160 IS-MAXI - 1,29	1,66	490	1,29	min.2 mt- max 12 mt
SP 200 IS-MAXI - 1,58	2,06	580	1,58	min.2 mt- max 12 mt
SP 230 IS-MAXI - 1,80	2,36	740	1,80	min.2 mt- max 12 mt
SP 250 IS-MAXI - 2,03	2,55	830	2,09	min.2 mt- max 12 mt

Tecnomeccanica S.r.l.
Via I° Maggio, 56 - 10035 Casale di Mazzè (TO)
Tel. +39 011 9830776 - Fax +39 011 9830776
www.tecnomecannicaformia.it

Hydraulic connections

- 2 piston tubes open close flat supply door
- 1 tilting piston tube
- 2 delivery and return pipes for hydraulic motors
- Spreading salt plate auger with flow regulator

ACCESSORIES

- Salt frangmeter roll
- Light bar
- 3-way diverter for hydraulic connection to the tractor with only 2 return pipes
- Stainless steel tank
- Independent hydraulic system

Only for PROFESSIONAL and INDUSTRIAL Models

- Automatic covering cloth
- TECNOPLUS security system

For MAXI Model

- **Manual covering cloth**

Tecnomeccanica S.r.l.
Via I° Maggio, 56 - 10035 Casale di Mazzè (TO)
Tel. +39 011 9830776 - Fax +39 011 9830776
www.tecnomecannicaformia.it